


Inlet: Ø350

- +1 Ø250
- +2 Ø250
- +3 Ø250
- 3 Ø250

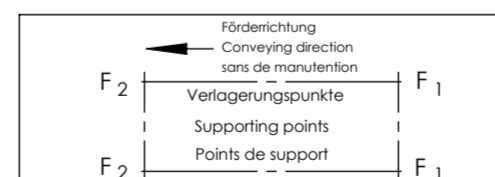

Mindestabstand zu stationären Teilen 80 mm
Minimum distance to stationary parts 80 mm
Distance minimum aux elements stationnaires 80 mm

Betriebsbelastung
Operation load
Charge en service

	stat. (N)	dyn. (N)
F ₁	v 2185 N	± 140 N
	h	± 15 N
F ₂	v 2185 N	± 100 N
	h	± 15 N

Frequenz, Frequency, Frequence 24 Hz
Gewicht, Weight, Poids ~ 810 kg
1kp = 9,81 N 1N = 0,102 kp

index	modification	date	name	index	modification	date	name

This drawing is not allowable for neither duplication nor accessible for any third party or competitor without our permission.	material	date	name	ALLGAIER PROCESS TECHNOLOGY Fredrik Mogensen AB Sveavägen 26 544 50 Hjo / Sweden www.allgaler-process-technology.com/en/fredrik-mogensen-ab
	weight (kg) 626	scale 1:20	drawn	
	description MSizer compact, C053x General drawing, for quotation only		checked	reference
	ISO 2768-mK ISO 13920 BE EN 20273-m	part-no.	drawing-no.	replaced by
				page / of 1 / 1