


Inlet: Ø350

- +1 Ø250
- +2 Ø250
- +3 Ø250
- 3 Ø250

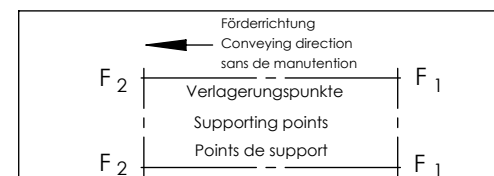

Mindestabstand zu stationären Teilen 80 mm  
 Minimum distance to stationary parts 80 mm  
 Distance minimum aux elements stationnaires 80 mm

Betriebsbelastung  
 Operation load  
 Charge en service

	stat. (N)	dyn. (N)
F <sub>1</sub>	3105 N	± 140 N
		± 15 N
F <sub>2</sub>	3105 N	± 100 N
		± 15 N

Frequenz, Frequency, Frequence 24 Hz  
 Gewicht, Weight, Poids ~ 1150 kg  
 1kp = 9,81 N 1N = 0,102 kp

index	modification	date	name	index	modification	date	name

This drawing is not allowable for neither duplication nor accessible for any third party or competitor without our permission.	material	weight (kg)	scale	date	name	<b>ALLGAIER</b>   PROCESS TECHNOLOGY Fredrik Mogensen AB Sveavägen 26 544 50 Hjo / Sweden <a href="http://www.allgaler-process-technology.com/en/fredrik-mogensen-ab">www.allgaler-process-technology.com/en/fredrik-mogensen-ab</a>	
	882	1:20	drawn	checked	name		
	description <b>MSizer compact, C103x</b> <b>General drawing, for quotation only</b>						reference
	tolerances ISO 2768-mK ISO 13920 BE EN 20273-m						replaced by
part-no.		drawing-no.		page / of		1 / 1	