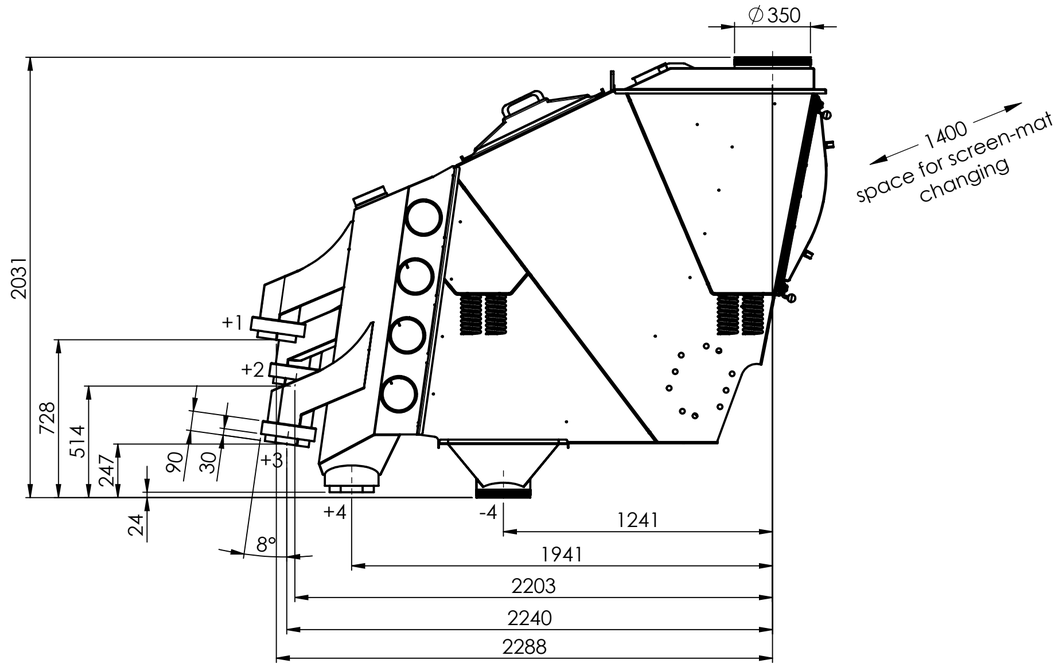

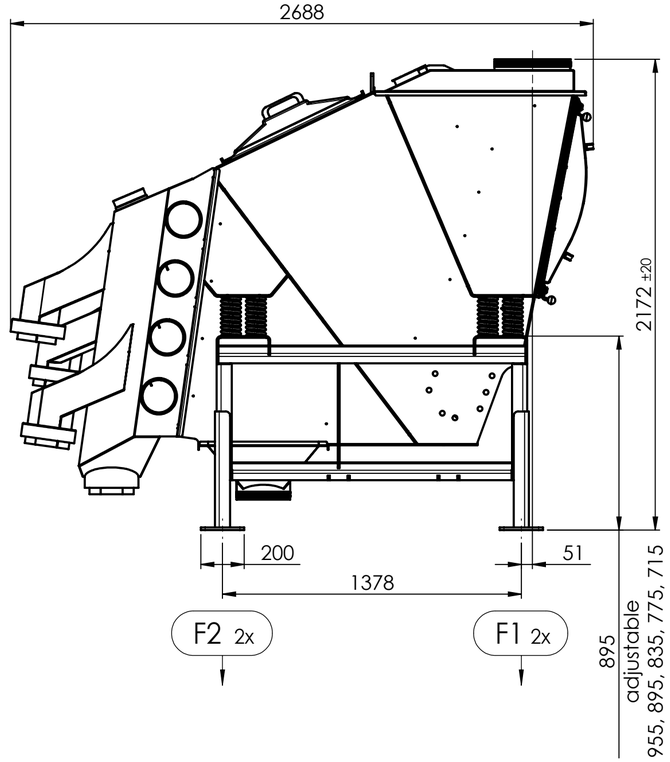

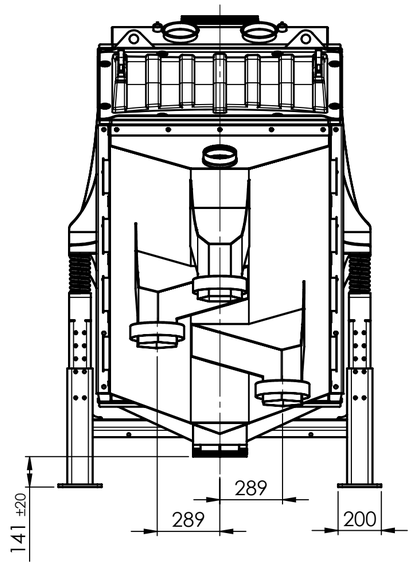

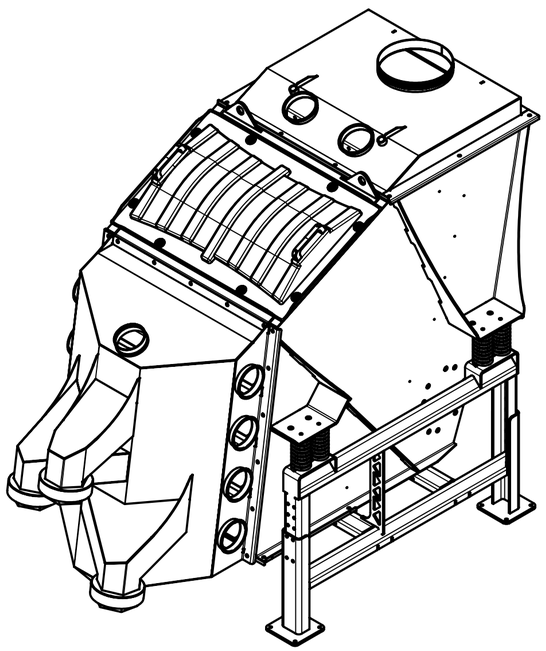

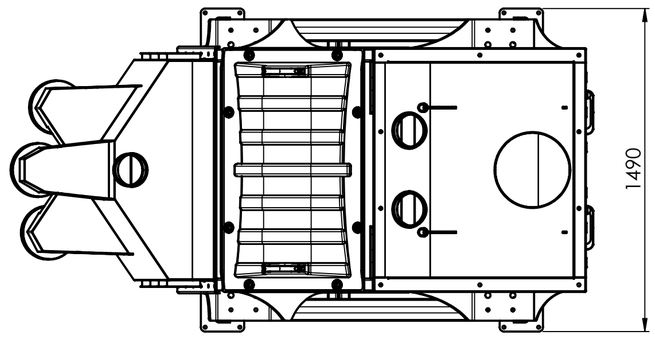

Inlet: Ø350

+1 Ø250
+2 Ø250
+3 Ø250
+4 Ø250
-4 Ø250

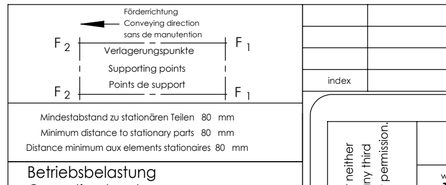

Mindestabstand zu stationären Teilen 80 mm
Minimum distance to stationary parts 80 mm
Distance minimum aux elements stationaires 80 mm

Betriebsbelastung
Operation load
Charge en service

		stat. (N)	dyn. (N)
F_1	v	3575 N	± 140 N
	h	———	± 15 N
F_2	v	3575 N	± 100 N
	h	———	± 15 N

Frequenz, Frequency, Frequence 24 Hz

Gewicht, Weight, Poids ~ 1325 kg

1kp = 9,81 N 1N = 0,102 kp

index	modification	date	name	index	modification	date	name

This drawing is not allowable for neither duplication nor accessible for any third party or competitor without our permission.

material

	date	name
drawn		
checked		
norm		

weight (kg) 1005

scale 1:20

tolerances
ISO 2768-mK
ISO 13920 BE
EN 20273-m

ALLGAIER | PROCESS TECHNOLOGY
Fredrik Mogensen AB
Sveavägen 26
544 50 Hjo / Sweden
www.allgaier-process-technology.com/en/fredrik-mogensen-ab

description
MSizer compact, C104x
General drawing, for quotation only

reference

compensation for

replaced by

part-no.

drawing-no.

page / of
1 / 1